

LED DISPLAY

USS960R4

960×960mm Advertising LED Display

960×960MM ADVERTISING LED DISPLAY

960×960MM ADVERTISING LED DISPLAY

USS960R4 SERIES

www.aludeed.com


Feature :

1. Die-cast magnesium alloy, strong and durable;
2. Double quick lock design, quick assembly;
3. Can be used for rental or fixed installation;
4. Outdoor series IP65 protection design;
5. High contrast, high refresh rate.




Quick Assembly

There are two quick locks on the top and left of the cabinet.

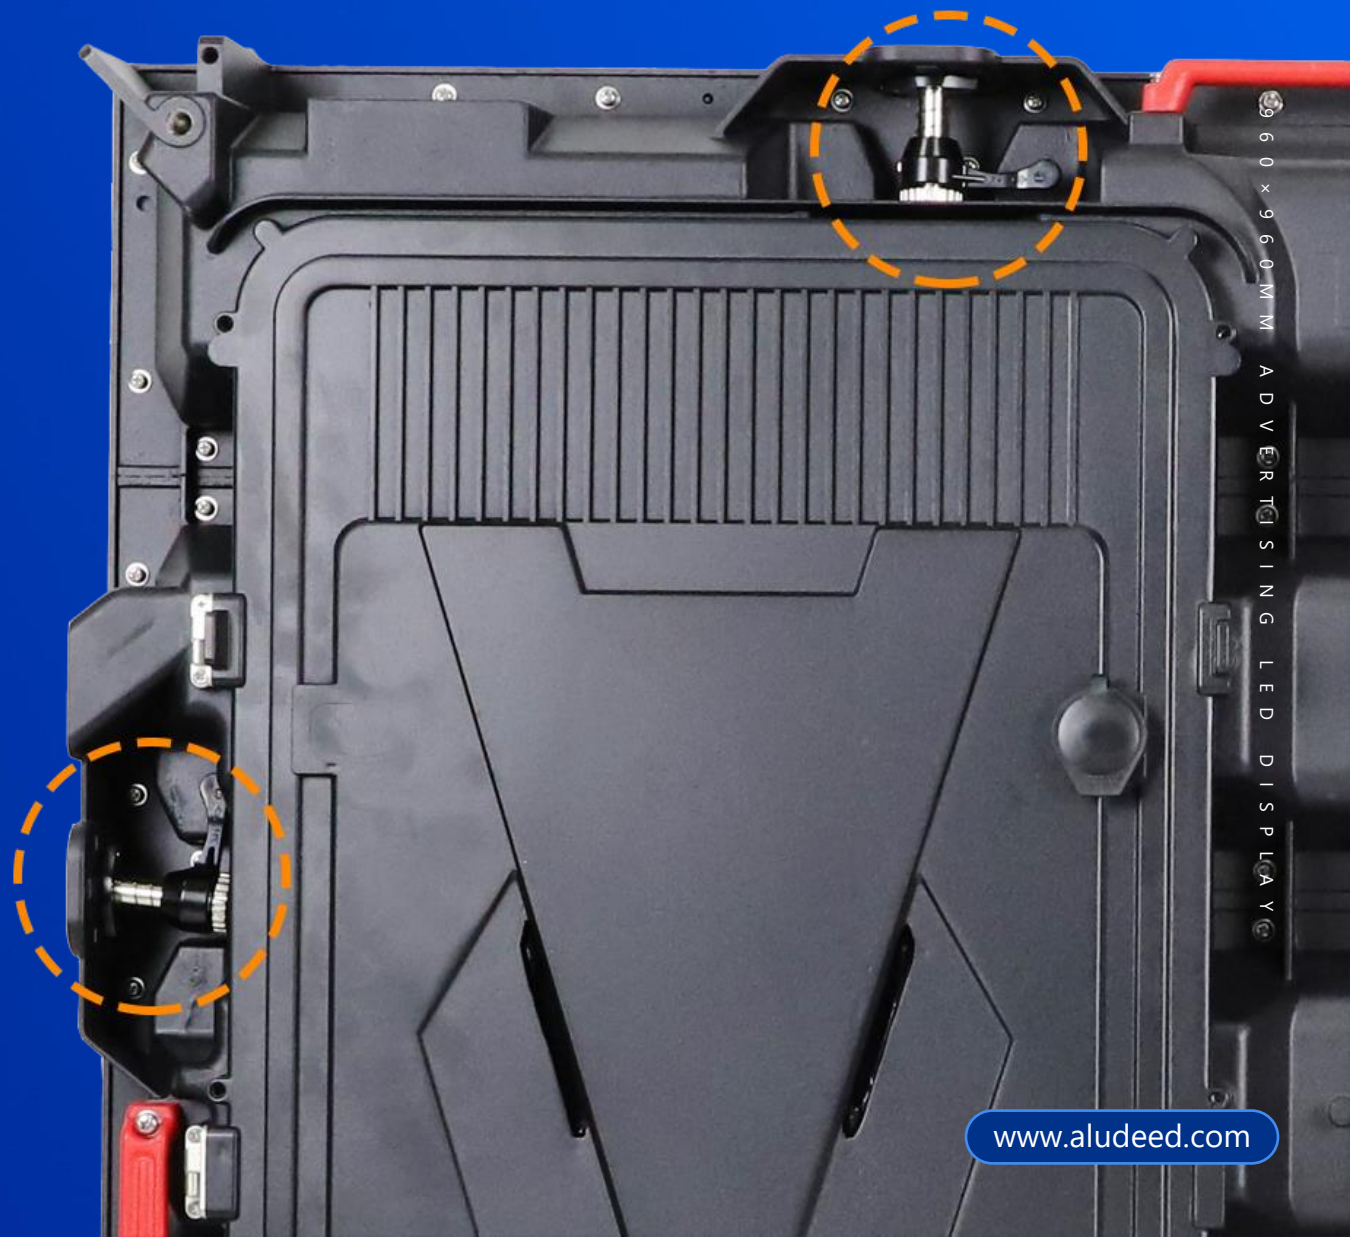


Hidden Line Design

Cables are connected through holes on the side of the cabinet.

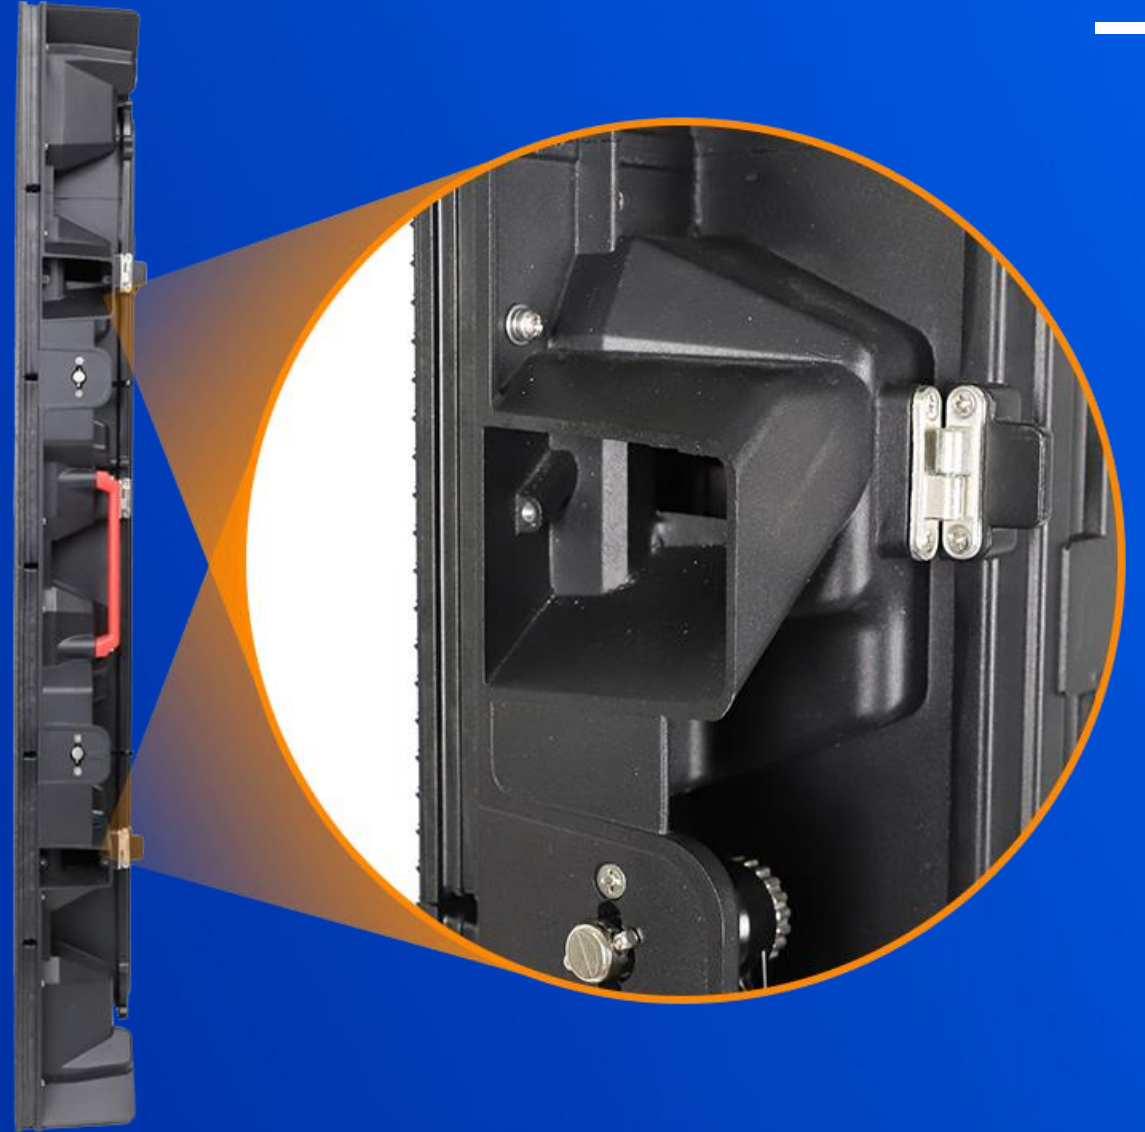

Openable Back Cover

Rear Service design, compact
structure, no gap installation.

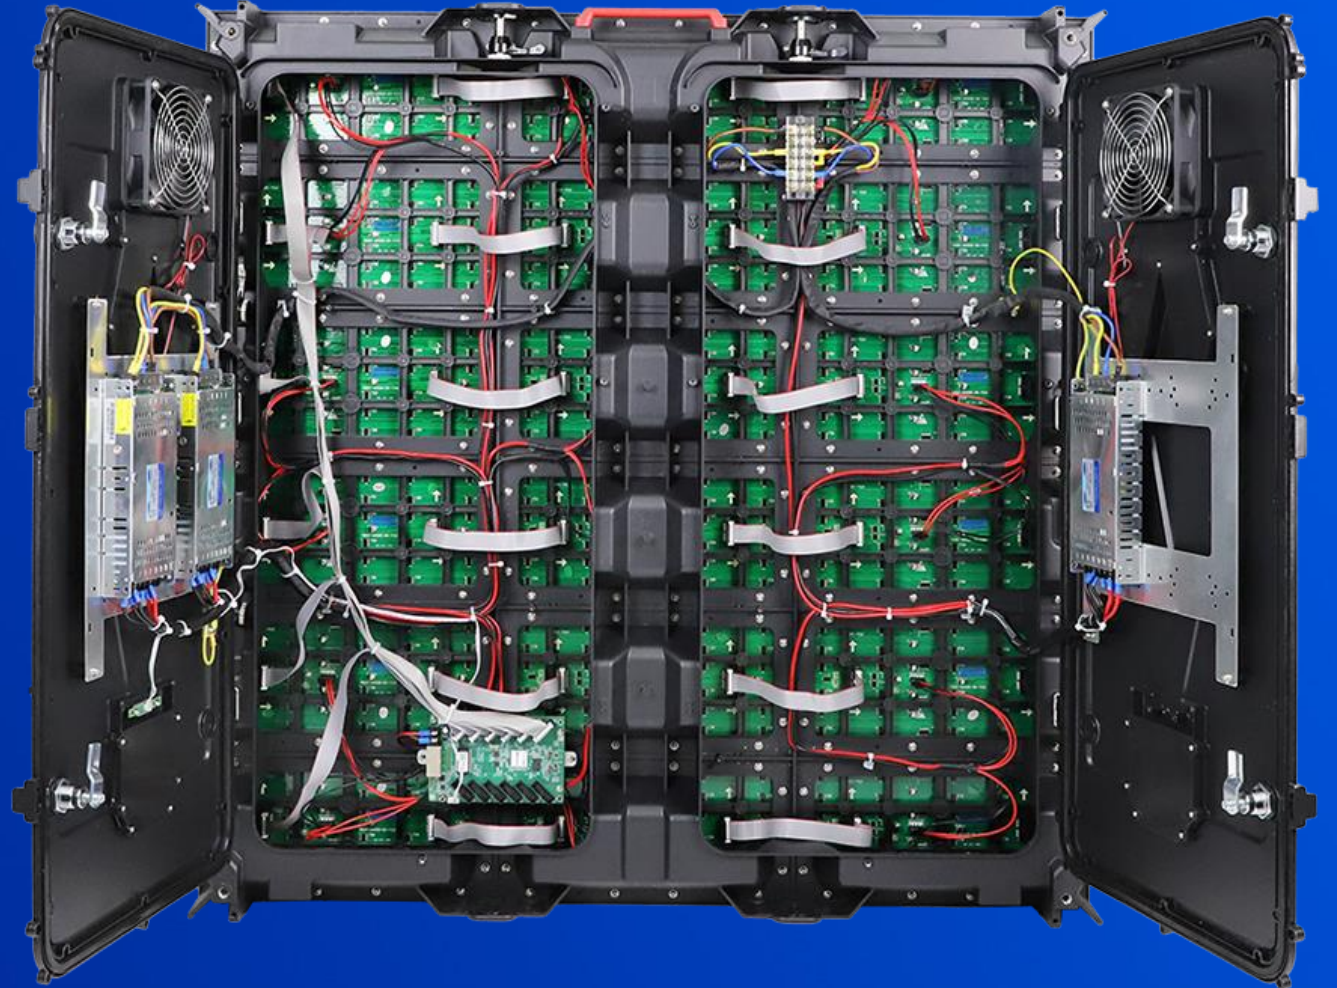

Fast Cooling

USS960R4 LED display is equipped with 2 fans for rapid heat dissipation.



LED DISPLAY

IP65 Protection

The cabinet supports IP65
dustproof and waterproof.



960x960MM ADVERTISING LED DISPLAY

960x960MM ADVERTISING LED DISPLAY

USS960R4 SERIES

www.aludeed.com

Superb Display Effect

LED DISPLAY

6500

CD/m² High Brightness

3840

Hz High Refresh Rate

9600x9600MM ADVERTISING LED DISPLAY

9600x9600MM ADVERTISING LED DISPLAY

USS960R4 SERIES

www.aludeed.com

Installation Method

LED DISPLAY

960 x 960MM ADVERTISING LED DISPLAY



Stack installation



Hanging installation

960 x 960MM ADVERTISING LED DISPLAY

USS960R4 SERIES

www.aludeed.com

Multiple Applications

LED DISPLAY

9 6 0 × 9 6 0 M M A D V E R T I S I N G L E D D I S P L A Y



9 6 0 × 9 6 0 M M A D V E R T I S I N G L E D D I S P L A Y

USS960R4 SERIES

www.aludeed.com

Packing Method

(Refer to the packaging method)

Cabinet size(L*H)	960*960mm
Packing Quantity	6pcs/case
Package Size(L*W*H)	1010*845*1140mm
Weight/Case	176Kg



USS960R4 Outdoor Advertising LED Display Parameter

[illegible]

USS960R4 Indoor Advertising LED Display Parameter

	Mode	USS960R4-IP2.5	USS960R4-IP3.076	USS960R4-IP4	USS960R4-IP5
Module Parameter	Pixel Pitch	2.5mm	3.076mm	4mm	5mm
	Pixel Configuration	SMD2020	SMD2020	SMD2020	SMD2020
	Driving Mode	1/32 duty	1/26 duty	1/20 duty	1/16 duty
	Module Resolution(Pixel)	128(L) * 64(H)	104(L) *52(H)	80(L) * 40(H)	64(L) * 32(H)
	Module Size(L*H)	320*160mm	320*160mm	320*160mm	320*160mm
	Density	160,000pixels/m²	105,625pixels/m²	62,500pixels/m²	40,000pixels/m²
	Module Mask	Pure black mask	Pure black mask	Pure black mask	Pure black mask
	Module Quantity in a Cabinet	3(L) * 6(H)	3(L) * 6(H)	3(L) * 6(H)	3(L) * 6(H)
Cabinet Parameter	Cabinet Dimension(L*H*D)	960*960*115mm	960*960*115mm	960*960*115mm	960*960*115mm
	Cabinet Resolution	384(L) * 384(H)	312(L) * 312(H)	240(L) * 240(H)	192(L) *192(H)
	Cabinet Material	Die-cast magnesium	Die-cast magnesium	Die-cast magnesium	Die-cast magnesium
	Cabinet Weight	≈19 KG	≈19 KG	≈19 KG	≈19 KG
	Protection Grade	IP31	IP31	IP31	IP31
Electricity Parameter	Brightness	800 cd/m²	800 cd/m²	700 cd/m²	700 cd/m²
	Best Viewing Distance	≥2.5m	≥3.076m	≥4m	≥5m
	Max. Power Consumption	457W/m²	413 W/m²	351W/m²	312W/m²
	Avg. Power Consumption	153W/m²	138 W/m²	117 W/m²	104W/m²
	Screen Refresh Frequency	≥3840Hz	≥3840Hz	≥3840Hz	≥3840Hz
	Frame Frequency	≥60Hz	≥60Hz	≥60Hz	≥60Hz
	Viewing Angle	140°(H); 140°(V)	140°(H); 140°(V)	140°(H); 140°(V)	140°(H); 140°(V)
	Gray Grade	14bits	14bits	14bits	14bits
	Display Color	4.4 trillion colors	4.4 trillion colors	4.4 trillion colors	4.4 trillion colors
	Brightness Adjustment	100 grades by software or automatically by sensor			
	Operation Power	AC100-240V 50-60Hz Switchable			
	Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI			
	Control Distance	100M (Ethernet cable);20KM (Optical fiber cable)			
	Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200			
	Color Temperature	5000—9300 adjustable	5000—9300 adjustable	5000—9300 adjustable	5000—9300 adjustable
	Working Temperature	-20 ~ +60 °C	-20 ~ +60 °C	-20 ~ +60 °C	-20 ~ +60 °C
	Storage Temperature	-30 ~ +70 °C	-30 ~ +70 °C	-30 ~ +70 °C	-30 ~ +70 °C
	Working Humidity	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH
	Out-of-Control Pixel Rate	≤0.01%	≤0.01%	≤0.01%	≤0.01%

THANKS

WhatsApp

+963 965 747 889

Email

info@aludeed.com

Website

www.aludeed.com