

LED DISPLAY

FOLDABLE
PHONE

FOLDABLE
PHONE

USS1920iP5

640x1920mm Indoor Foldable Poster LED Screen

New
Phone

New
Phone

INDOOR FOLDABLE POSTER LED SCREEN

INDOOR FOLDABLE POSTER LED SCREEN

USS1920iP5 SERIES

www.aludeed.com


Feature :

1. 640mmx1920mm 1:3 size cabinet;
2. Front service desing with GOB LED module;
3. Creative double-sided folding design;
4. Support multi-screen splicing;
5. The base is equipped with 4 wheels, allowing the cabinet to move freely.




Folding Design

The LED poster screen is foldable and can be displayed on both sides.

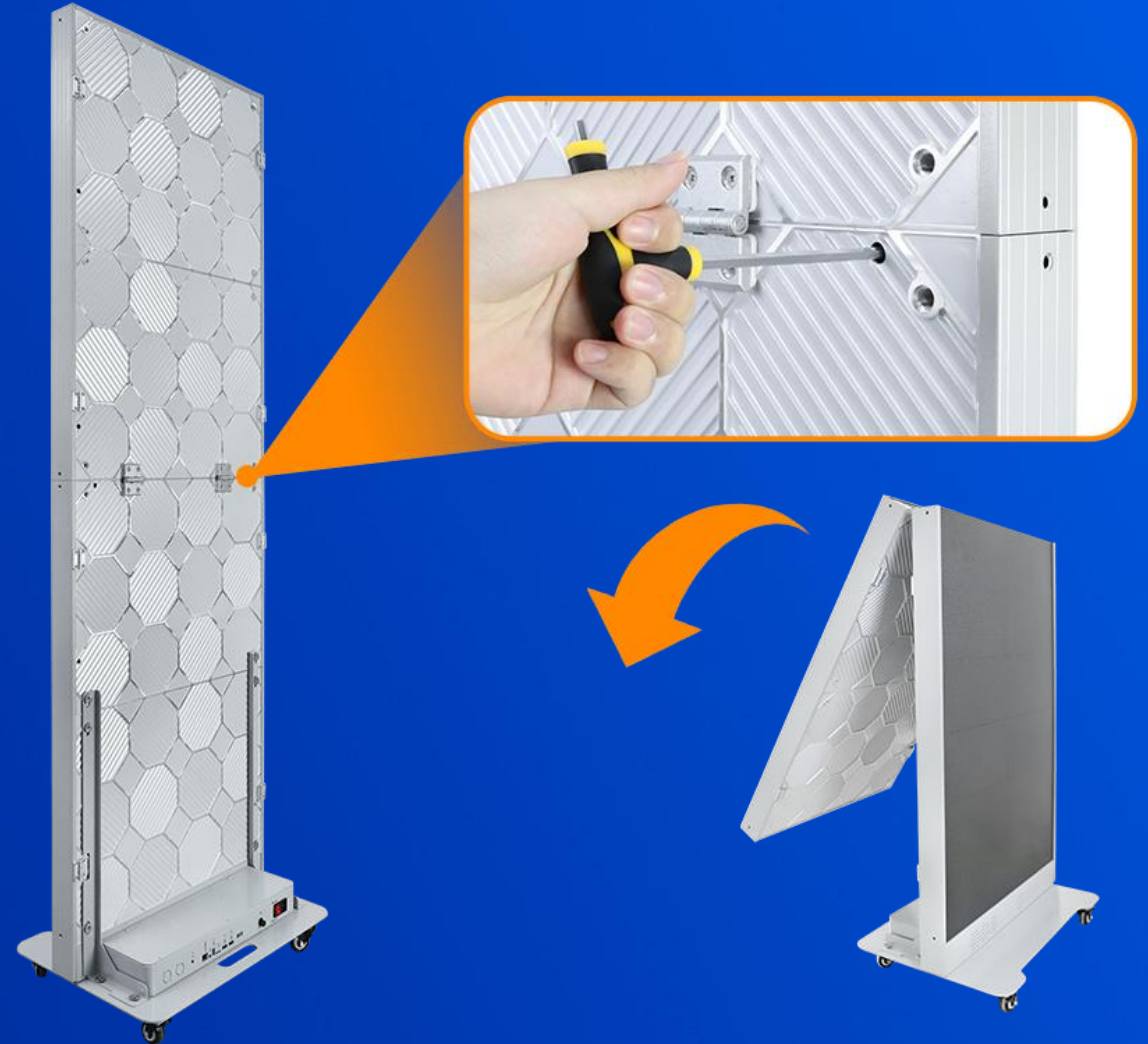

Front Service

Full front service design,
saving installation space.

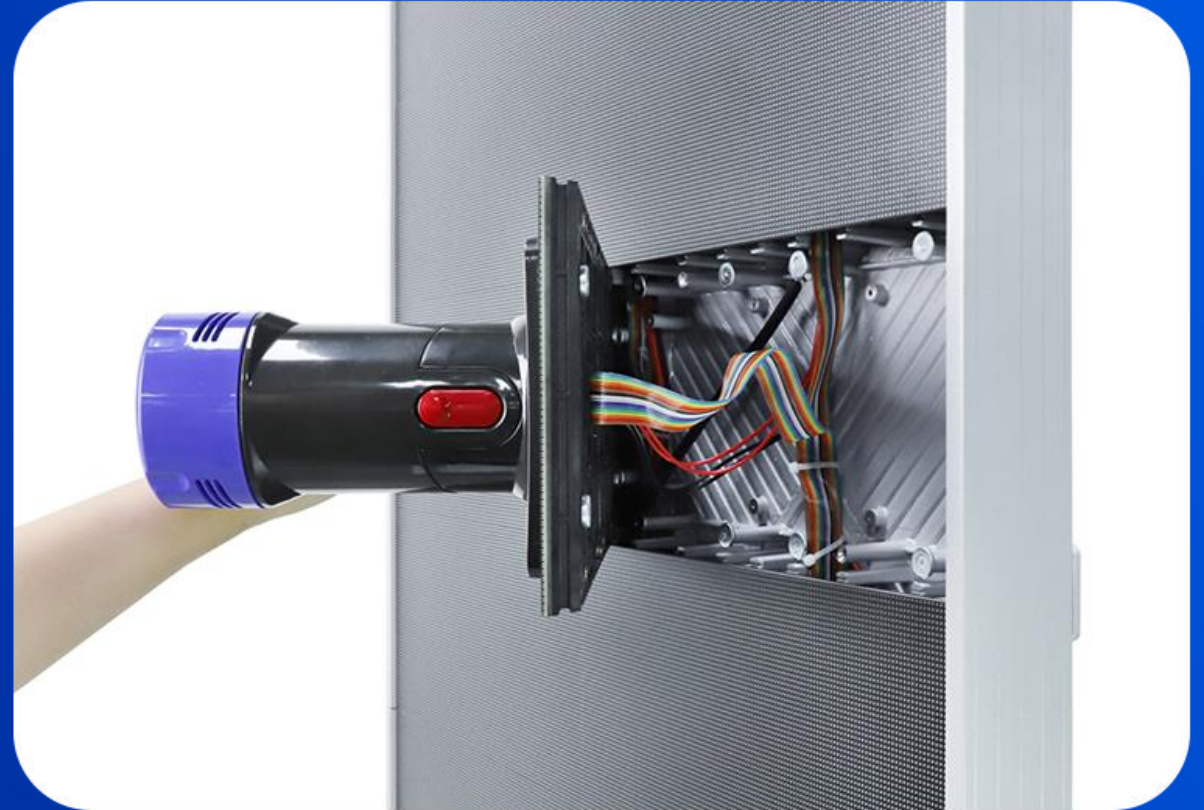

Multi-screen Splicing

Equipped with a link lock, which can realize seamless splicing of multiple screens.

Lock



Magnetic Foldable Frame

Rich Port Configuration

Interfaces include HDMI, USB 3.0, WiFi, SIM card slot, and Ethernet.



Equipped with Speakers

Delivering a complete
audiovisual experience
on a single screen.



GOB LED Module

GOB module design,
high protection.

USS1920iP5 SERIES

LED DISPLAY



www.aludeed.com

Smart Cloud Management

LED screen video can be updated through iPad, Phone, PC computer.



Superb Display Effect

High contrast

3840Hz high refresh rate



USS1920iP5

Low contrast

Low refresh rate



Competing Product

Single-Person Packaging

One person can easily fold the poster screen and store it in the small flight case.



Packing Method

(Refer to the packaging method)



Cabinet size(L*H)	640*1920mm	
Packing Quantity	1pcs/case	2pcs/case
Package Size(L*W*H)	790*600*1364mm	790*1177*1364mm
Weight/Case	104Kg	181Kg

USS1920iP5 Indoor Poster LED Display Parameter

	Mode	USS1920iP5-P1.25	USS1920iP5-P1.53	USS1920iP5-P1.86	USS1920iP5-P2	USS1920iP5-P2.5
Module Parameter	Pixel Pitch	1.25mm GOB	1.53mm GOB	1.86mm GOB	2mm GOB	2.5mm GOB
	Pixel Configuration	SMD1010	SMD1212	SMD1515	SMD1515	SMD2020
	Driving Mode	1/64 duty	1/52 duty	1/43 duty	1/40 duty	1/32 duty
	Module Resolution(Pixel)	256(L) *128(H)	208(L) * 104(H)	172(L) * 86(H)	160(L) * 80(H)	128(L) * 64(H)
	Density	640,000pixels/m ²	422,500pixels/m ²	288,906pixels/m ²	250,000pixels/m ²	160,000pixels/m ²
	Module Size(L*H)	320*160mm	320*160mm	320*160mm	320*160mm	320*160mm
	Module Quantity in a Cabinet	2(L) * 12(H)	2(L) * 12(H)	2(L) * 12(H)	2(L) * 12(H)	2(L) * 12(H)
Display Parameter	Display Dimension(L*H*D)	640*1920*60mm	640*1920*60mm	640*1920*60mm	640*1920*60mm	640*1920*60mm
	Display Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
	Display Weight	≈55KG	≈55KG	≈55KG	≈55KG	≈55KG
	Protection Grade	IP31	IP31	IP31	IP31	IP31
	Display Resolution	512(L) * 1536(H)	416(L) * 1248(H)	344(L) * 1032(H)	320(L) * 960(H)	256(L) * 768(H)
Electricity Parameter	Brightness	600cd/m ²	600cd/m ²	600cd/m ²	700cd/m ²	800cd/m ²
	Best Viewing Distance	≥1.25m	≥1.53m	≥1.86m	≥2m	≥2.5m
	Max. Power Consumption	580W/m ²	580W/m ²	580W/m ²	439W/m ²	457W/m ²
	Avg. Power Consumption	195W/m ²	195W/m ²	195W/m ²	150W/m ²	153W/m ²
	Screen Refresh Frequency	≥3840Hz	≥3840Hz	≥3840Hz	≥3840Hz	≥3840Hz
	Frame Frequency	≥60Hz	≥60Hz	≥60Hz	≥60Hz	≥60Hz
	Gray Grade	14 bits	14 bits	14 bits	14 bits	14 bits
	Viewing Angle	140°(H); 140°(V)	140°(H); 140°(V)	140°(H); 140°(V)	140°(H); 140°(V)	140°(H); 140°(V)
	Display Color	4.4 trillion colors	4.4 trillion colors	4.4 trillion colors	4.4 trillion colors	4.4 trillion colors
	Brightness Adjustment	100 grades by software or automatically by sensor				
	Operation Power	AC100-240V 50-60Hz Switchable				
	Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI				
	Control Distance	100M (Ethernet cable); 20KM (Optical fiber cable)				
	Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200				
	Color Temperature	2000—9500 adjustable	2000—9500 adjustable	2000—9500 adjustable	2000—9500 adjustable	2000—9500 adjustable
	Working Temperature	-10 ~ +60 °C	-10 ~ +60 °C	-10 ~ +60 °C	-10 ~ +60 °C	-10 ~ +60 °C
	Storage Temperature	-30 ~ +70 °C	-30 ~ +70 °C	-30 ~ +70 °C	-30 ~ +70 °C	-30 ~ +70 °C
	Working Humidity	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH
	Out-of-Control Pixel Rate	≤0.01%	≤0.01%	≤0.01%	≤0.01%	≤0.01%

USS1920iP5 COB Indoor Poster LED Display Parameter

	Mode	USS1920iP5-P1.25-COB	USS1920iP5-P1.53-COB	USS1920iP5-P1.86-COB
Module Parameter	Pixel Pitch	1.25mm	1.53mm	1.86mm
	Pixel Configuration	SMD1010	Flip chip COB	Flip chip COB
	Driving Mode	1/64 duty	1/52 duty	1/43 duty
	Module Resolution(Pixel)	256(L) *128(H)	208(L) * 104(H)	172(L) * 86(H)
	Density	640,000pixels/m ²	422,500pixels/m ²	288,906pixels/m ²
	Module Size(L*H)	320*160mm	320*160mm	320*160mm
	Module Quantity in a Cabinet	2(L) * 12(H)	2(L) * 12(H)	2(L) * 12(H)
Display Parameter	Display Dimension(L*H*D)	640*1920*60mm	640*1920*60mm	640*1920*60mm
	Display Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
	Display Weight	≈55KG	≈55KG	≈55KG
	Protection Grade	IP31	IP31	IP31
	Display Resolution	512(L) * 1536(H)	416(L) * 1248(H)	344(L) * 1032(H)
Electricity Parameter	Brightness	600cd/m ²	600cd/m ²	600cd/m ²
	Best Viewing Distance	≥ 1.25m	≥ 1.53m	≥ 1.86m
	Max. Power Consumption	580W/m ²	580W/m ²	580W/m ²
	Avg. Power Consumption	195W/m ²	195W/m ²	195W/m ²
	Screen Refresh Frequency	≥3840Hz	≥ 3840Hz	≥3840Hz
	Frame Frequency	≥60Hz	≥60Hz	≥ 60Hz
	Gray Grade	14 bits	14 bits	14 bits
	Viewing Angle	140°(H); 140°(V)	140°(H); 140°(V)	140°(H); 140°(V)
	Display Color	4.4 trillion colors	4.4 trillion colors	4.4 trillion colors
	Brightness Adjustment	100 grades by software or automatically by sensor	100 grades by software or automatically by sensor	100 grades by software or automatically by sensor
	Operation Power	AC100-240V 50-60Hz Switchable	AC100-240V 50-60Hz Switchable	AC100-240V 50-60Hz Switchable
	Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
	Control Distance	100M (Ethernet cable); 20KM (Optical fiber cable)	100M (Ethernet cable); 20KM (Optical fiber cable)	100M (Ethernet cable); 20KM (Optical fiber cable)
	Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200	800*600, 1024*768, 1280*1024, 1600*1200	800*600, 1024*768, 1280*1024, 1600*1200
	Color Temperature	2000—9500 adjustable	2000—9500 adjustable	2000—9500 adjustable
	Working Temperature	-10 ~ +60 °C	-10 ~ +60 °C	-10 ~ +60 °C
	Storage Temperature	-30 ~ +70 °C	-30 ~ +70 °C	-30 ~ +70 °C
	Working Humidity	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH
	Out-of-Control Pixel Rate	≤0.01%	≤0.01%	≤0.01%

THANKS

WhatsApp

+963 965 747 889

Email

info@aludeed.com

Website

www.aludeed.com