

LED DISPLAY

USS-FD

Indoor Front Desk LED Display

I
N
D
O
O
R

F
R
O
N
T

D
E
S
K

L
E
D

D
I
S
P
L
A
Y

I
N
D
O
O
R

F
R
O
N
T

D
E
S
K

L
E
D


D
I
S
P
L
A
Y

USS-FD SERIES

www.aludeed.com

Feature :

1. Easy to use, plug and play;
2. Front service design;
3. Lightweight cabinet, one-person operation;
4. Mobility thanks to wheels on the bottom.
5. Two pixel pitch and two sizes optional ;
6. Equipped with flexible GOB LED module ;

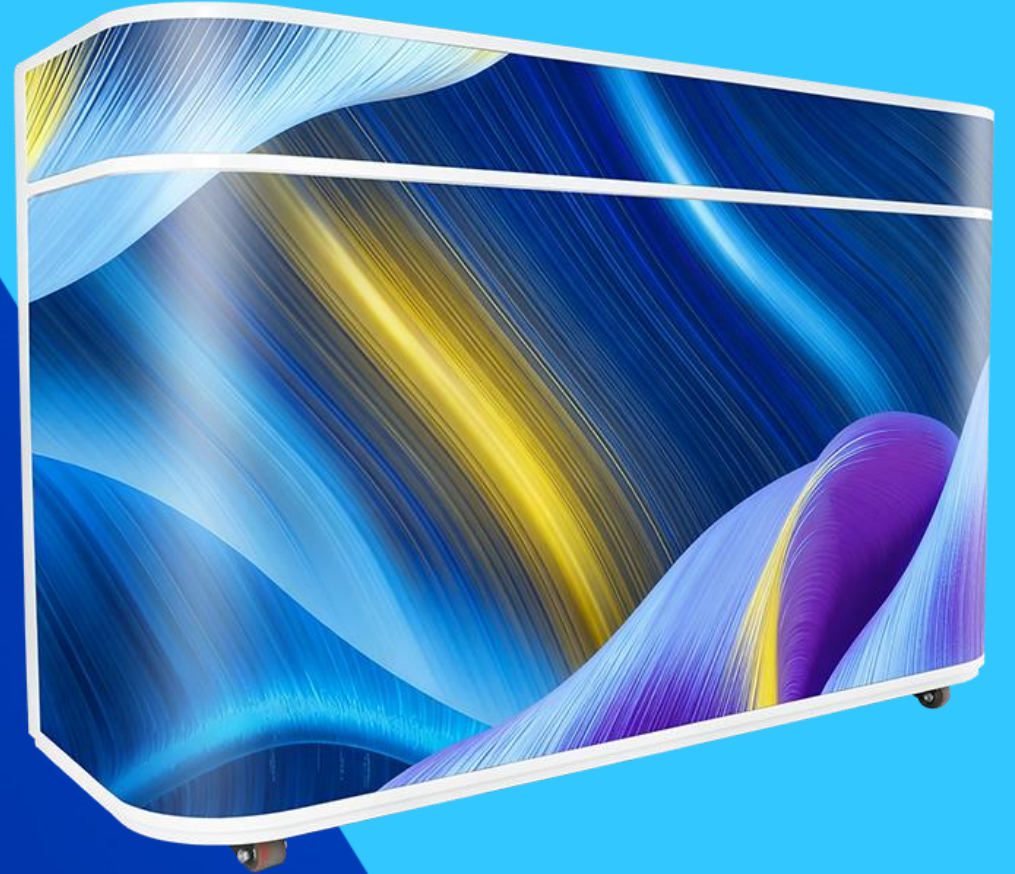

Front Service

The flexible LED module supports front service, which is quick.



GOB Flexible LED Module

320x160mm Flexible led module, GOB protection.





Socket Can be Customized

US , Eu , UK , CN, South
non-standard standard etc.




Ample Storage Space

Multiple drawers help
you store your belongings

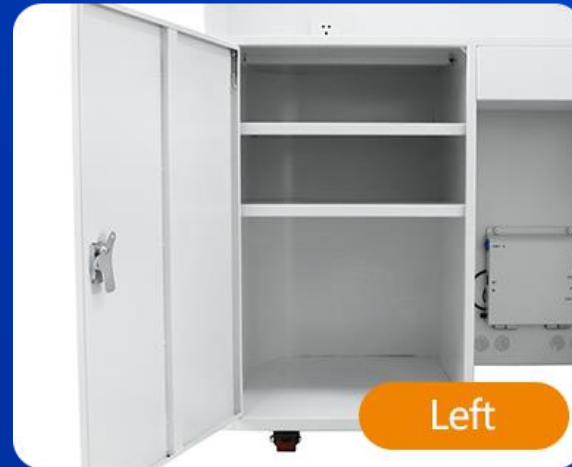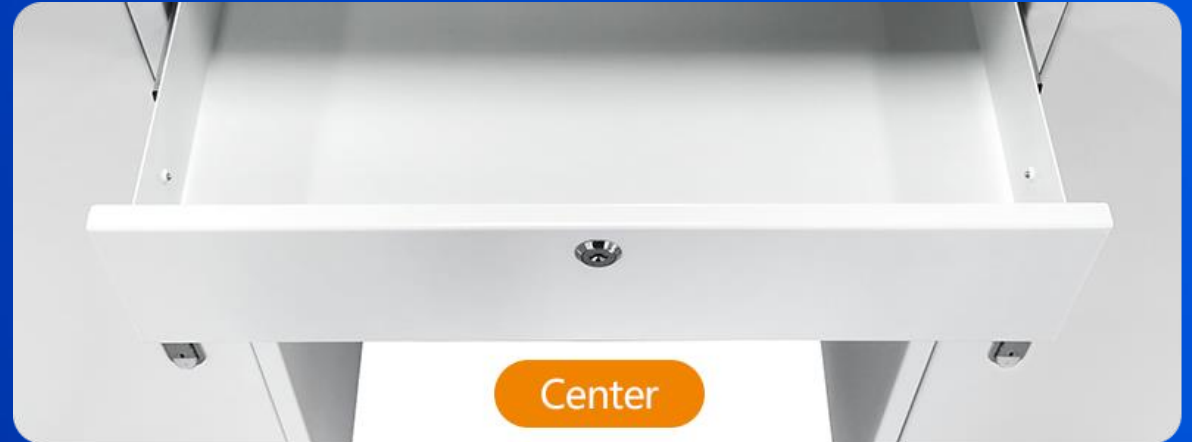

Easy to Use

Plug and play, support
wifi, U disk, HDMI,
can add speaker.

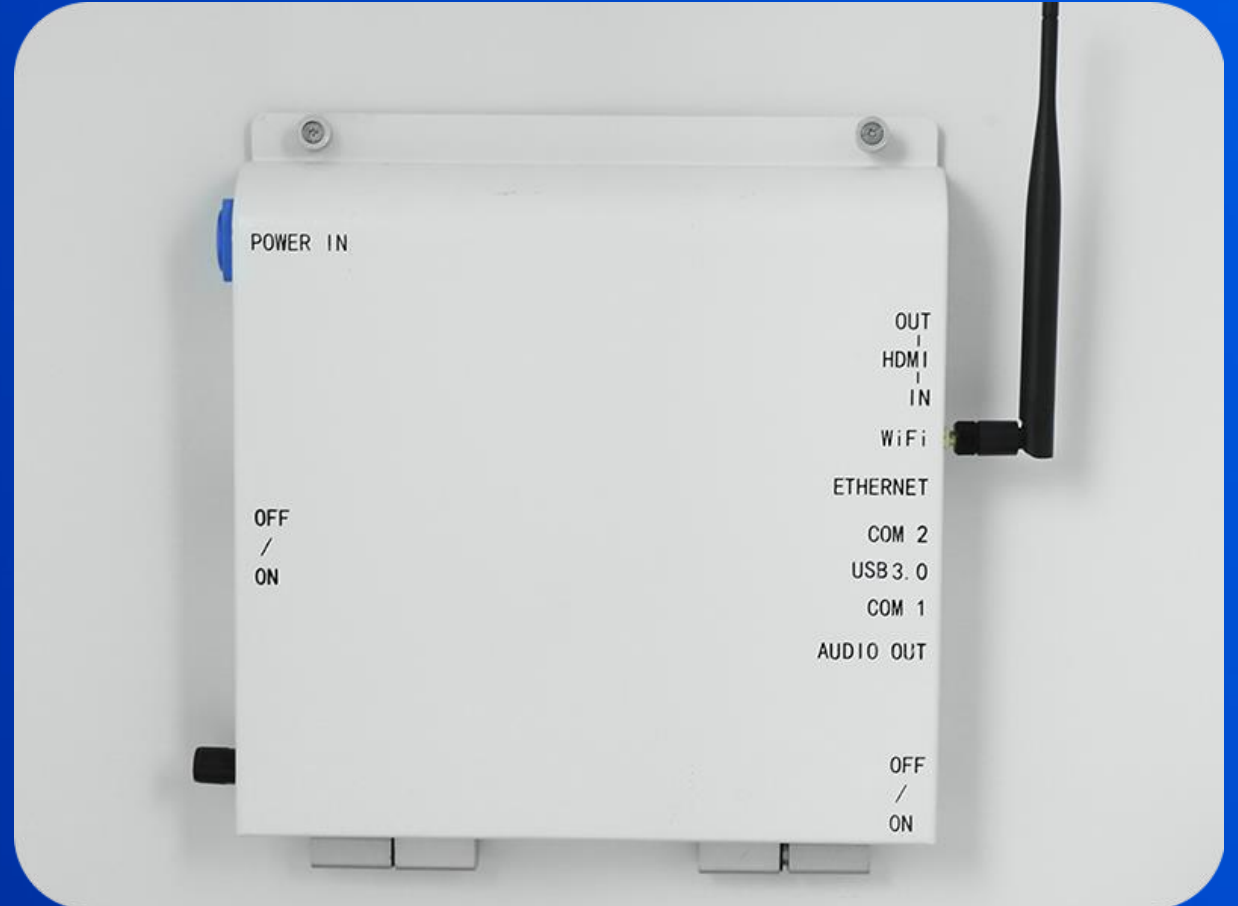

Easy to Move

Equipped with wheels for 360-degree movement.




Customized Flight Case

Easily package LED screen
with one person.



Two Styles

LED DISPLAY

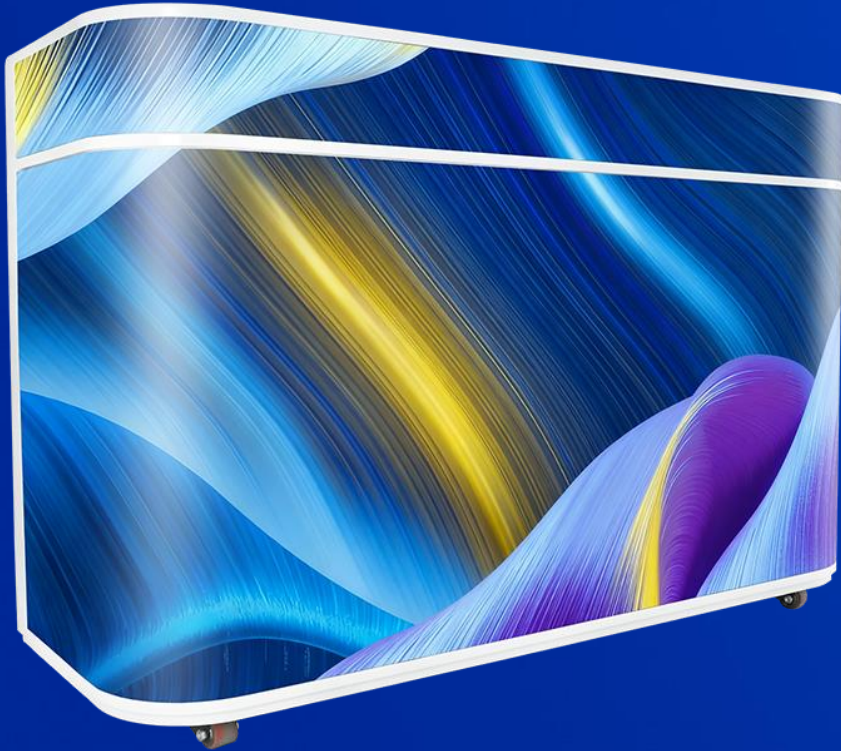

Business Model



Entertainment Model

I
N
D
O
O
R
F
R
O
N
T
D
E
S
K
L
E
D
D
I
S
P
L
A
Y

I
N
D
O
O
R
F
R
O
N
T
D
E
S
K
L
E
D
D
I
S
P
L
A
Y

USS-FD SERIES

www.aludeed.com

Multiple Applications

INDOOR FRONT DESK LED DISPLAY



INDOOR FRONT DESK LED DISPLAY

Packing Method

(Refer to the packaging method)

Cabinet size(L*D*H)	1065*585*1100mm 1360*585*1100mm 1675*585*1100mm
Packing Quantity	1pcs/case
Package Size(L*D*H)	1320*710*1320mm 1615*710*1320mm 1930*710*1320mm
Weight/Case	97Kg/115Kg/130Kg



USS-FD Indoor Front Desk LED Display Parameter

	Mode	USS-FD-P1.53	USS-FD-P1.86	USS-FD-P2.5
Module Parameter	Pixel Pitch	1.53mm (GOB)	1.86mm (GOB)	2.5mm (GOB)
	Pixel Configuration	SMD1212	SMD1515	SMD1515
	Driving Mode	1/52 duty	1/43 duty	1/32 duty
	Module Resolution(L*H)	208*104	172*86	128*64
	Module Size(L*H)	320*160mm	320*160mm	320*160mm
	Density	422,500pixels/m ²	288,906pixels/m ²	160,000pixels/m ²
	Module Quantity in a Cabinet(L*H)	6* 6 / 7* 6 / 8* 6	6* 6 / 7* 6 / 8* 6	6* 6 / 7* 6 / 8* 6
Cabinet Parameter	Display size(L*H)	1920* 960mm / 2240* 960mm / 2560* 960mm	1920* 960mm / 2240* 960mm / 2560* 960mm	1920* 960mm / 2240* 960mm / 2560* 960mm
	Cabinet Dimension(L*H*D)	1065*585*1100mm / 1360*585*1100mm / 1675*585*1100mm	1065*585*1100mm / 1360*585*1100mm / 1675*585*1100mm	1065*585*1100mm / 1360*585*1100mm / 1675*585*1100mm
	Cabinet Resolution(Pixel)	1248*624 / 1456*624 / 1664*624	1032*516 / 1204*516 / 1376*516	768*384 / 896*384 / 1024*384
	Cabinet Material	Iron	Iron	Iron
	Cabinet Weight	97KG / 115KG / 130KG	97KG / 115KG / 130KG	97KG / 115KG / 130KG
	Protection Grade	IP43	IP43	IP43
Electricity Parameter	Brightness	600 cd/m ²	600 cd/m ²	600 cd/m ²
	Best Viewing Distance	≥1.53m	≥1.86m	≥2.5m
	Max. Power Consumption	1200W/m ²	1200W/m ²	1200W/m ²
	Average power consumption	500W/m ²	500W/m ²	500W/m ²
	Screen Refresh Frequency	≥3840Hz	≥3840Hz	≥3840Hz
	Viewing Angle	140°	140°	140°
	Frame Frequency	≥60Hz	≥60Hz	≥60Hz
	Gray Grade	12-16 bits	12-16 bits	12-16 bits
	Display Color	4.4 trillion colors	4.4 trillion colors	4.4 trillion colors
	Operation Power	AC110-220V 50-60Hz Switchable	AC110-220V 50-60Hz Switchable	AC110-220V 50-60Hz Switchable
	Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
	Control Distance	100M (Ethernet cable);20KM (Optical fiber cable)	100M (Ethernet cable);20KM (Optical fiber cable)	100M (Ethernet cable);20KM (Optical fiber cable)
	Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200	800*600, 1024*768, 1280*1024, 1600*1200	800*600, 1024*768, 1280*1024, 1600*1200
	Color Temperature	10-level adjustable	10-level adjustable	10-level adjustable
	Working Temperature	-20 ~ +50 °C	-20 ~ +50 °C	-20 ~ +50 °C
	Storage Temperature	-20 ~ +60 °C	-20 ~ +60 °C	-20 ~ +60 °C
	Working Humidity	10% ~ 90% RH	10% ~ 90% RH	10% ~ 90% RH
	Out-of-Control Pixel Rate	≤0.01%	≤0.01%	≤0.01%

THANKS

WhatsApp

+963 965 747 889

Email

info@aludeed.com

Website

www.aludeed.com