Hotel Hardware

Access Reader

HR500S ACCESS READER WITH SIEDLE COVER FOR OUTDOOR USE

Online offline access reader with contactless MIFARE reader. This reader has been developed for installation in Siedle Series 611 casings and is supplied in silver as standard. Further colour options on request.

The reader is supplied with Siedle cover but without Siedle frame.

▼ ACCESS READER WITH COVER

MH8733	HR500S Access Reader with Siedle cover, MIFARE Classic

▼ ACCESSORIES AND OPTIONS

MH8772	Built-in power supply unit 24 W
MH8773	Built-in power supply unit 54 W

Dimensions



► FEATURES

- Contactless reader technology
- Online operation (option) with HAC7000/32 Control Unit
- Optical status display via 3 LEDs
- Acoustic feedback via signal transmitter
- Permanent door release
- Power supply via external power supply unit for reader and door strike
- RS485 interface (2-wire) for connection to control unit
- Reading range up to 5 cm
- For outdoor use

TECHNICAL DATA

Voltage supply	12 to 24 V DC external
Max. power input	1.2 W
Max. power consumption	60 mA at 12 V DC
Ambient temperature	0 - 55 °C
IP protection class	52
Dimensions (H x W x D)	99 x 99 x 35 mm
Interface	RS485
Colour	Silver
Mounting	Surface-mounted; flush-mounted in Siedle frame
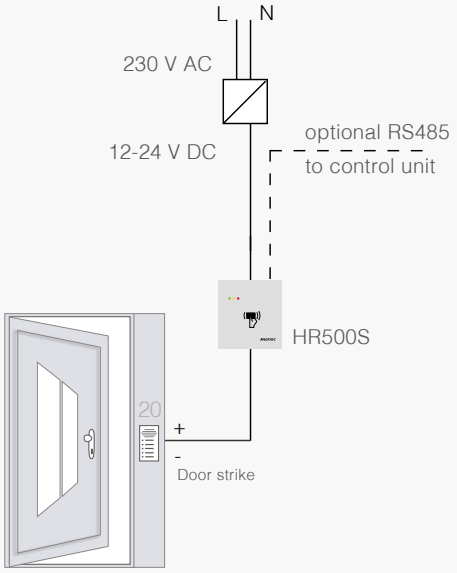
Installation example