

Hotel Hardware

Access Reader for Room Controller



HRC500S ACCESS READER WITH SIEDLE COVER FOR OUTDOOR USE

Online offline access reader with contactless MIFARE reader. This reader has been developed for installation in Siedle Series 611 casings and is supplied in silver as standard. Further colour options on request. The reader is supplied with Siedle cover but without Siedle frame.

Note: The HRC500S Access Reader is operated together with an HDC15-V3 Room Controller..

► FEATURES

- Contactless reader technology
- Online operation (option) with HAC7000/32 Control Unit
- Optical status display via 3 LEDs
- Acoustic feedback via signal transmitter
- Permanent door release
- Power supply via external power supply unit for reader, room controller and door strike
- Reading range up to 5 cm
- For outdoor use

TECHNICAL DATA


Voltage supply	12 to 24 V DC external
Max. power input	1.2 W
Max. power consumption	60 mA at 12 V DC
Ambient temperature	0 - 55 °C
IP protection class	52
Dimensions (H x W x D)	99 x 99 x 35 mm
Interface	RS485
Colour	Silver
Mounting	Surface-mounted; flush-mounted in Siedle frame

▼ ACCESS READER WITH COVER

MH8227 HRC500S Access Reader with Siedle cover, MIFARE Classic

▼ ACCESSORIES AND OPTIONS

MH9200 HDC15-V3 Room Controller
MH8772 Built-in power supply unit 24 W
MH8773 Built-in power supply unit 54 W

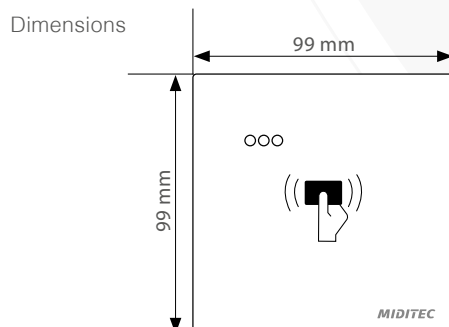

Installation example

