

Hardware

Reader for SCU7000/x Universal Control Unit



M400C ACCESS READER WITH BUSCH-JAEGER COVER

Access reader with contactless MIFARE/LEGIC reader. The reader has an RS485 interface for connection to an SDC15-V3 Door Controller.

The M400C reader with Busch-Jaeger cover has been developed for Busch-Jaeger switch ranges. Standard: future linear, colour: studio white

The LEDs display the authorisation status of the read card.

Note: The reader is operated together with an SDC15-V3 Door Controller.

► FEATURES

- Contactless reader technology
- Online operation with SCU7000/x Universal Control Unit and SDC15-V3 Door Controller
- Optical status display via 3 LEDs
- Acoustic feedback via signal transmitter
- Power supply via external power supply for reader, door controller and door strike
- Integrated sabotage contact for connection to universal control unit
- Reading range up to 5 cm

TECHNICAL DATA

Voltage supply	12 V DC external
Max. power input	0,72 W
Max. power consumption	60 mA at 12 V DC
Ambient temperature	-10 to 55 °C
IP protection class	50
Interface	RS485 / 2-wire
Dimensions (H x W x D)	80 x 80 x 45/25 mm
Colour	Studio white
Mounting	Flush-mounted and cavity-wall socket

▼ M400C BUSCH-JAEGER

MH9776 M400C Busch-Jaeger, MIFARE Classic / DESFire

MH9777 M400C Busch-Jaeger, LEGIC prime / advant


▼ ACCESSORIES AND OPTIONS

MH9222 SDC15-V3 Door Controller

MH8772 Built-in power supply 24 W

MB5384 Decentralised authorisation assignment per reader

Dimensions

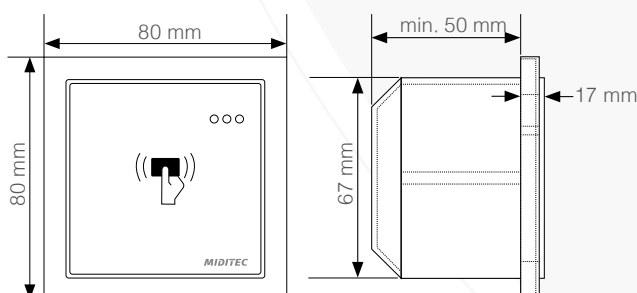

Installation example

