


Hardware Offline

milock Focus III | Electronic Door Lock



Door outside with reading rosette

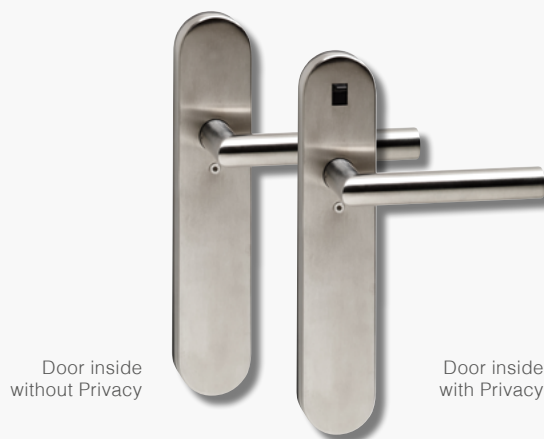

Door inside without Privacy

Door inside with Privacy

MILOCK FOCUS III

The milock Focus door terminal is a mechatronic door lock system for offline access control, e.g. in hotels and office buildings. It consists of an electronic mortise lock, a handle set and the reading rosette (outside of the door). The room door is simply unlocked by briefly holding out the chip card and opened with the door handle.

Mortise lock:

The mortise lock with bolt latch is suitable for single-leaf doors with door handle according to DIN EN179 and DIN18250. The lock is prepared for profile cylinder incl. 2 forend screws.

Antenna and battery compartment:

The MIFARE antenna is located in the reading rosette (outside of door). The battery compartment is located in the long plate (inside of door). The rosette and long plate are available in silver with a stainless steel look or in brass.

Handle / latch:

MIDITEC provides you with a selection of handle variants.

► FEATURES

- Contactless MIFARE Classic/DESFire reader (outside)
- From the outside the fitting can only be opened via electronic authorisation
- Visual and acoustic system status indication (e.g., locking status, battery replacement required)
- Storage of the last 3,000 bookings
- Programming via system cards
- Flexible time zone management and control
- Administration of access rights via group organisation (256 locking groups, 16 weekly programmes per group)
- Allocation of authorisations by card
- Blocking list for blocked cards can be generated
- Battery status can be written to card
- Up to 4 time zones per day
- Time for door release selectable
- Automatic changeover between daylight saving time and standard time
- Reading range up to 1.5 cm
- Easy to install

TECHNICAL DATA

Ambient temperature	0 °C - 65 °C
Battery	2 x AA lithium battery note manufacturer's recommendation
Battery life (room temperature)	approx. 20,000 openings or approx. 2 years stand-by
IP protection class	52
Cabinet width DIN	max. 15.8 mm
Backsets DIN	optional 55 mm, 60 mm, 65 mm or 80 mm
Forend size	20 mm (default)
Distance (hole spacing) DIN	72 mm

Hardware Offline

milock Focus III | Electronic Door Lock

▼ MILOCK FOCUS III

MF1300	milock Focus III, stainless steel matt brushed, MIFARE Classic / DESFire
MF1301	milock Focus III with Privacy, stainless steel matt brushed, MIFARE Classic / DESFire

▼ OPTIONS

MF1302	Option emergency opening (door thickness outside < 25 mm)
MF1303	Option emergency opening (door thickness outside > 25 mm)
MF1304	Option BLE
MF1305	Special forend 24 mm

▼ PROFILE HALF CYLINDER BODY

HW0018	Profile half cylinder body 45-10 with security card
HW0033	Profile half cylinder body 30-10 with security card
HW0061	Profile half cylinder body 55-10 without security card
HW0062	Profile half cylinder body 40-10 with security card
HW0092	Profile half cylinder body 35-10 with security card
HW0103	Profile half cylinder body 30-10 without security card

A profile half cylinder in the appropriate dimensions of the door must be ordered.

You will find the door handle variants on the following page.

Hardware Offline

milock Focus III | Door Handle Types

OVERVIEW DOOR HANDLE TYPES STAINLESS STEEL



MF1020

Door handle type MIDITEC Standard L,
stainless steel matt brushed



MF1021

Door handle type L-Panic,
stainless steel matt brushed



MF1022

Door handle type C,
stainless steel matt brushed



MF1023

Door handle type U,
stainless steel matt brushed

▼ MILOCK FOCUS III STAINLESS STEEL

MF1200

milock Focus, stainless steel matt
brushed, MIFARE Classic

For further versions, please refer to our price list.

MIDITEC STANDARD PACKAGE

Basic fitting



Outside

Inside



With Privacy