

Hardware

SCU7000/2/4/32 Control Units: Options


CASING OPTIONS

MIDITEC STEEL WALL CASING WITH LOCK

for SCU7000/x



Steel wall casing, closed

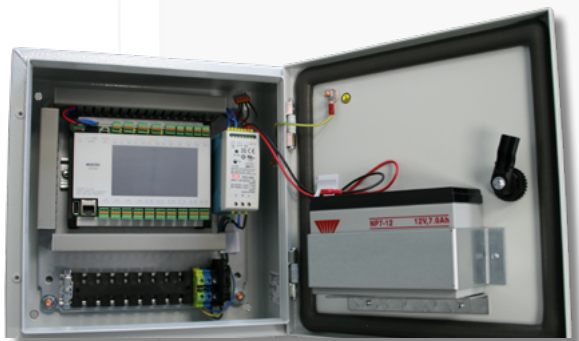

Steel wall casing, open

TECHNICAL DATA

Voltage supply	230 V
Ambient temperature	0 °C to 45 °C
Environmental class	II
IP protection class	43
Cable gland	from below
Weight	approx. 5.7 kg (without UPS) approx. 7.9 kg (with UPS)
Dimensions (H x W x D)	30 x 30 x 15.6 cm
Dimensions with cable gland	33.5 x 30 x 15.6 cm
Material	steel
Colour	light grey (RAL 7035)
Mounting	wall mounting

MIDITEC 19" DRAWER WITH LOCK

for SCU7000/x, rack-mount casing for 19" rack



19" drawer, closed



19" drawer, open

TECHNICAL DATA

Voltage supply	230 V
Ambient temperature	0 °C to 45 °C
Cable gland	from the back
Weight	approx. 8.1 kg (without UPS) approx. 10.3 kg (with UPS)
Dimensions (H x W x D) 3U	13.5 x 48.5 x 29.5 cm
Dimensions without mounting bracket	13.5 x 45 x 29.5 cm
Material	steel
Colour	black
Mounting	19" rack