Hotel Hardware

Glass Reader with DND/MUR Status Display for Room Controller

HRC3500 SKYLINE BRILLIANCE ACCESS READER WITHOUT BELL

Online offline reader with contactless MIFARE reader. This reader is part of the Skyline Brilliance series and consists of a glass panel that displays the reading area as well as status displays for DND and MUR.

The standard reader is supplied in black. However, we provide a selection of RAL colours for the colour design of the glass panel. The mounting frame behind the glass panel is available in black and white.

Note: The access reader is operated together with an HDC15-V3 Room Controller.

▼ ACCESS READER

MH5309	HRC3500 Skyline Brilliance without bell, MIFARE Classic

▼ ACCESSORIES AND OPTIONS

MH9200	HDC15-V3 Room Controller
MH8772	Built-in power supply unit 24 W
MH8773	Built-in power supply unit 54 W

Dimensions





► FEATURES

- Contactless reader technology
- Online operation (option) with HAC7000/32 Control Unit
- Optical status display via multicolour LEDs
- Acoustic feedback via signal transmitter
- LEDs for DND (Do Not Disturb) and MUR (Make Up Room)
- RS485 interface (2-wire) for connection to the room controller
- Power supply via external power supply unit for reader, room controller, and door strike
- Reading range up to 5 cm

TECHNICAL DATA

Voltage supply	12 to 24 V DC external
Max. power input	2.4 W
Max. power consumption	60 mA at 12 V DC
Ambient temperature	10 °C - 55 °C
IP protection class	50
Interface	RS485
Dimensions of glass panel (with frame) H x W x D	100 x 100 x 13 mm
Material / Colour	Glass / black (RAL 9005)
Mounting	Flush-mounted and cavity-wall socket
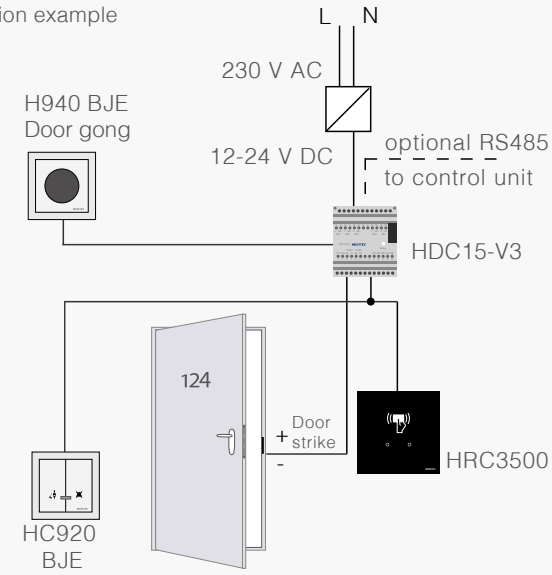
Installation example